Part 1

OPERATIONAL DESCRIPTION

CONTENTS

SPECIFICATIONS 1- 2

OPERATING THE RISOGRAPH 2700 ..... 1- 5
1. Operation panel 1- 5
2. Advice displayed on LCD 1- 7

OPERATION PROCEDURE (OPERATION MANUAL) 1- 9
Names of the Components 1- 9
The operation panel 1-10
Starting the machine 1-11
Adding papger and setting the paper guides 1-12
Setting paper-receiving table 1-14
Printing 1-16
Adjusting for the original size 1-18
How to adjust the contrast for different originals 1-19
How to set the printing speed 1-20
How to adjust the printing position 1-21
Test Printing 1-22
How to use operation panel keys
- Functions of operation panel keys 1-23
- Inputting the print quantity 1-24
- Inputting auxiliary functions 1-24
- Confidential operation 1-25
- ADF (Repeat) 1-26

ADF (Automatic Document Feeder) 1-27
- Replacing drum (Color change) 1-28

How to change colors 1-29
How to change the master 1-30
How to change the ink 1-32
How to make the original fit to print 1-33
Two-colored printing 1-34
Cleaning 1-35
Options & Information 1-37

UNPACKING 1-38

INSTALLATION & NOTICES 1-39
1. Adequate installation of the machine 1-39
2. Connection to the power source 1-39
3. Attention 1-39

UNPACKING

UNPACKING PROCEDURE

1. Remove the box jointers. (4 places)
   ⇒ See fig. 1
2. Take off the outer box.
3. Insert the lifting handles into the holes at the bottom base. (4 corners)
   ⇒ See fig. 2
4. Using the handles, lift the machine out of the packing and put it on the stand.
5. Remove the power cord and original holder from the base plate of the packing.
6. Remove the vinyl cover and the white protection mat.
7. Tear off the the fixing tapes.
8. Remove the white shock-absorbing mats from under both the Image Scanner and the Thermal Head.
9. Remove the fixing styrofoam from between the Master Removal unit and the Scraper unit.
10. Attach the Original holder and Original catch to the body. ⇒ See fig. 3
11. Install the machine.

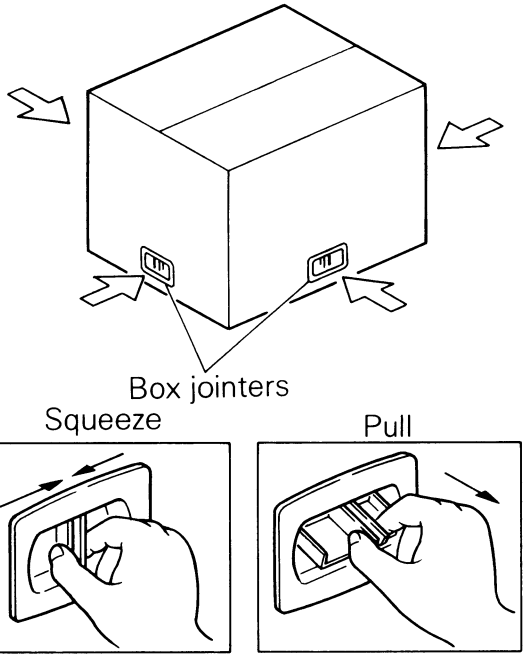

fig.1

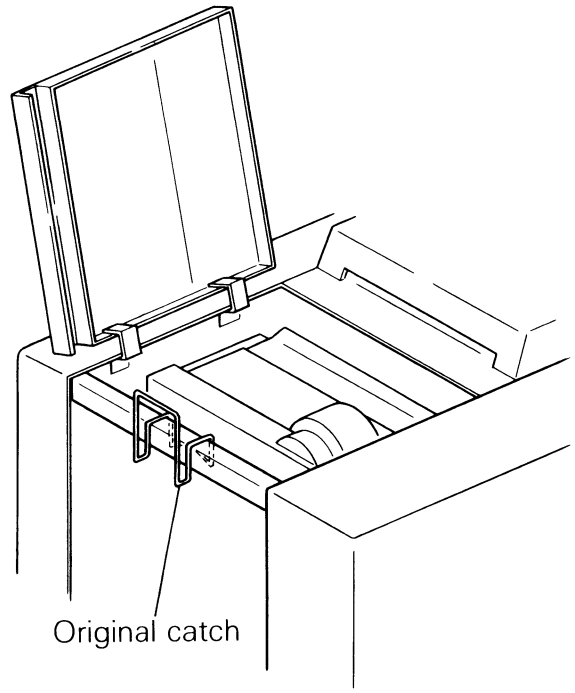

fig.3

fig.2

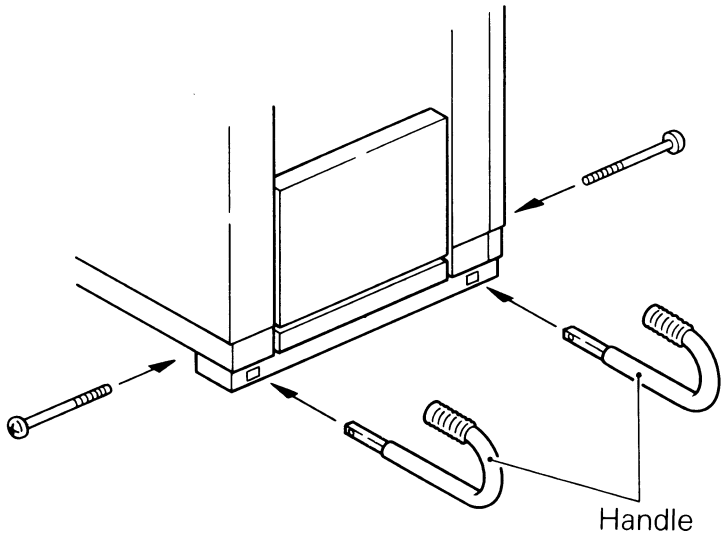

!!ATTENTION!!

1. The operation manual and quality check sheet are packed in the vinyl bag put on the white protection mat.
2. The original catch is put inside the master-roll holder together with the master flanges.